

DIE	E~E6 DIE RG type Coaxial Cable Connector Ratchet Crimper														PN	SO PN	
	.429"	.360"	.324"	.319"	.256"	.255"	.213"	.187"	.178"	.151"	.137"	.128"	.100"	.078"			.068"
	10.9	9.14	8.23	8.10	6.50	6.48	5.41	4.75	4.52	3.84	3.48	3.25	2.54	1.98	1.72	1.09	1.07
E			✓			✓	✓						✓		✓		
E1						✓	✓	✓							✓		
E2				✓	✓		✓								✓		
E3						✓	✓				✓		✓		✓	✓	
E4	✓											✓	✓		✓		
E5									✓	✓		✓		✓	✓		✓
E6		✓		✓			✓						✓				



Material: AISI-4140
 Surface treatment: Zinc Phosphate
 Treatment: Finished with Heat Treatment
 Procedure: Precision and Wax-Lost Casting or Metal Injection Molding (MIM)

HT-2130
 Carbon Steel Handle

Quick Change Ratchet Crimper Series Die-sets

PATENTED
 USA / TAIWAN
 GERMANY/ CHINA
 ★ Designed by Germany.
 Made in Taiwan.

WARNING: Cancer and Reproductive Harm
 www.P65Warnings.ca.gov

★ **H2 DIE**
 For AMP 1.5 Superseal Terminal
 AWG 22-20/16
 0.35-0.5/1.5 mm²

★ **H3 DIE**
 For AMP 1.5 Superseal Terminal
 AWG 18/17
 0.75/1.0 mm²

★ **H6 DIE**
 For Delphi Weather Pack Terminal
 AWG 22/20-18
 0.35/0.5-0.8 mm²


★ **H7 DIE**
 For Delphi Weather Pack Terminal
 AWG 16-14/12
 1.0-2.0/3.0 mm²



★ **D DIE**
 Cord End Terminal
 AWG 22/20/18/16
 /14/12
 0.5/0.75/1.0/1.5
 /2.5/4.0 mm²

★ **F DIE**
 Cord End Terminal
 AWG 10/8/6
 6.0/10/16 mm²

★ **F1 DIE**
 Cord End Terminal
 AWG 4/2
 25/35 mm²

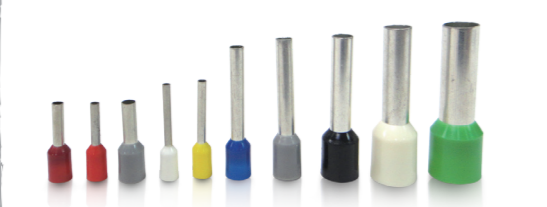

For Waterproof Terminal & For Cord End Terminal

★ **K1 DIE**
 For Deutsch Terminal
 AWG 14/12
 For DTP

★ **K2 DIE**
 For Deutsch Terminal
 AWG 10/12
 6.0/5.0 mm²
 For DTP

★ **K3 DIE**
 For Deutsch Terminal
 AWG 18/16/14
 For DT



★ **K4 DIE**
 For Deutsch Terminal
 AWG 20/18/16
 For DT

★ **K5 DIE**
 For Deutsch Terminal
 AWG 20/18/16
 For DTM

★ **K6 DIE**
 For Deutsch Terminal
 AWG 16/14/12
 For DT

★ **K7 DIE**
 For Deutsch Terminal (Solid type)
 Size 20/16/12
 For DTM/DT/DTP

★ **KQ8-DIE**
 For Deutsch Contact (Solid type)
 Size 20/16/12
 For DTM/DT/DTP

For Deutsch Terminal


★ **A DIE**
 Insulated Terminal
 AWG 22-18/16-14/12-10
 0.5-1.0/1.5-2.5/4.0-6.0 mm²

★ **A1 DIE**
 Heat Shrink Butt Connector
 AWG 22-18/16-14/12-10/8
 0.5-1.0/1.5-2.5/4.0-6.0/10 mm²

★ **A2 DIE**
 Fully Insulated Quick Disconnect
 AWG 22-18/16-14/12-10
 0.5-1.0/1.5-2.5/4.0-6.0 mm²

★ **A3 DIE**
 Miniature Insulated Terminal
 AWG 26-22/24-18/22-16
 0.1-0.5/0.25-1.0/0.5-1.5 mm²

★ **A4 DIE**
 Insulated Flag Terminal
 AWG 22-18/16-14
 0.5-1.0/1.5-2.5 mm²

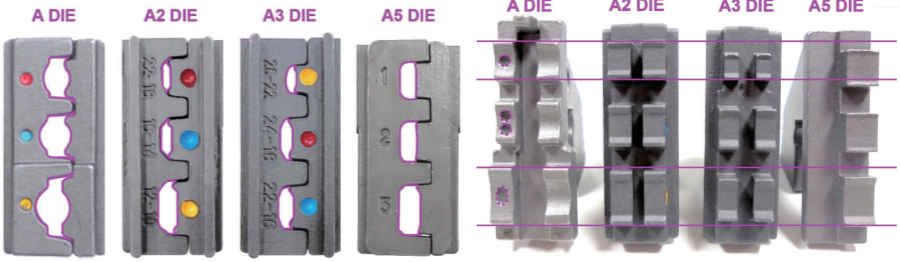

★ **A5 DIE**
 Closed End Connector & Heat Shrink Terminal
 AWG 22-16/16-14/12-10
 0.5-1.5/1.5-2.5/4.0-6.0 mm²

★ **A6 DIE**
 Insulated Flag Terminal
 AWG 12-10
 4.0-6.0 mm²

★ **B DIE**
 Non-Insulated Terminal
 AWG 20-16/16-14/12-10/8
 0.5-1.5/1.5-2.5/4.0-6.0/10 mm²

★ **B1 DIE**
 Non-Insulated Terminal
 AWG 6/4
 16/25 mm²

Handle Material:
 PP+TPR
 (PAHs, RoHS,
 SVHC Approved)



For Insulated Terminal & Non-Insulated Terminal